

See-full product range at: gamer.com.au

Engineering Equipment









1092L x 594W x 114Нимм Wheels: Ø75IMMIX 22IMM **З8імм** Ground Clearance Weight: 6 Kg

Drill Chuck Arbors

180 KG

CAPACITY

\$47/9)

PN: BONE4031

MT2 x JT6 Arbor **PN: DCAMT2J6** MT3 x JT6 Arbor PN: DCAMT3J6 Other sizes available. HRC: 44-48°

Accuracy: 0.05 / 50 mm

Length: 105.3 mm (closed)

Length: 110.3 mm (closed)

Keyless 3-16 мм Drill Chuck

\$720) 6720



209) **PN: VKD104**

Drift Slide Hammer

 Made from carbon steel Length: 375 mm Weight: 1.3 Kg

DNs WHD



Established in the early 1980s in Lodi, Italy, HARLINGEN has evolved into a global powerhouse in the engineering sector, specialising in CNC tooling for the aerospace, automotive and manufacturing industries. Today, HARLINGEN has expanded their range and with strategic fulfillment centres in California and Shanghai. They proudly cater to thousands of clients operating in over 40 countries worldwide.

Coated Micro-Grain Carbide Turning Inserts

 Sold in packs of 1 	0				
		10	De		3
		are .			
ТСМТ	WCMT	D	CMT	CCMT	
		\triangle			7
TNMG	WNMG	TF	PMR	CNMG	ì
PN	Shape	Point Radius	Cutting Width	Thickness	
TCMT16T304	Triangle	0.4 mm	16 mm	3.97 mm	\$119
TCMT16T308	Triangle	0.8 mm	16 mm	3.97 mm	\$119
TPMR160304	Triangle	0.4 mm	16 mm	3.18 mm	\$119
TPMR160308	Triangle	0.8 mm	16 mm	3.18 mm	\$119
TNMG160404	Triangle	0.4 mm	16 mm	4.76 mm	\$119
TNMG160408	Triangle	0.8 mm	16 mm	4.76 mm	\$119
WCMT050308	Trigon	0.8 mm	5 mm	3.18 mm	\$139
WCMT06T304	Trigon	0.4 mm	6 mm	3.97 mm	\$129
WNMG080404	Trigon	0.4 mm	8 mm	4.76 mm	\$139
WNMG080408	Trigon	0.8 mm	8 mm	4.76 mm	\$139
DCMT070204	55° Rhomboid	0.4 mm	7 mm	2.38 mm	\$129
DCMT11T304	55° Rhomboid	0.4 mm	11 mm	3.97 mm	\$149
CCMT060204	80° Rhomboid	0.4 mm	6 mm	2.38 mm	\$99
CNMG120404	80° Rhomboid	0.4 mm	12 mm	4.76 mm	\$139

0.8 mm

0.4 mm

0.8 mm

Coated Micro-Grain Carbide Milling Inserts



TiN Coated Carbide GTN Parting & Grooving Inserts

· Suited to general purpose steel · Sold in packs of 10

Cutting Width	PN	
2 mm	GTN-2	\$89
3 mm	GTN-3	\$89
4 mm	GTN-4	\$119
5 mm	GTN-5	\$139

TiAIN Micro-Grain Carbide MGMN Parting & Grooving Inserts

Suited to general Cutting ΡN purpose steel and Width stainless steel 2 mm MGMN200 \$149 · Sold in packs of 10 3 mm **MGMN300** \$159

Nickel Plated Cut-Off Tool Blades & Blocks

· Corrosion resistant Nickel Plating

a	rti	ng	В	lad	es

	5
5	Mandanase
	2
	The support of the second

)	arting Blades					
	Size	PN				
	19 x 2 mm	NCIH19-2	\$59			
	19 x 3 mm	NCIH19-3	\$59			
	26 x 2 mm	NCIH26-2	\$59			
	26 x 3 mm	NCIH26-3	\$59			
	32 x 3 mm	NCIH32-3	\$109			
	32 x 4 mm	NCIH32-4	\$109			
	32 x 5 mm	NCIH32-5	\$109			

Parting Blocks

Length	Blade Width	Blade Height	Shank	PN	
56 mm	2-3 mm	19 mm	12 mm	SLTBN12-02	\$89
75 mm	2-3 mm	26 mm	16 mm	SLTBN16-05	\$99
75 mm	2-3 mm	26 mm	20 mm	SLTBN20-05	\$99
75 mm	2-5 mm	32 mm	25 mm	SLTBN25-06	\$129

TiAIN Micro-Grain Carbide Right Handed Threading Inserts

80° Rhomboid

80° Rhomboid

80° Rhomboid



CNMG120408

ССМТ09Т304

CCMT120408

· Made of micro-grain carbide with TiAIN coating · Suited to cast iron, general purpose steel and stainless steel Sold in packs of 10

12 mm

9 mm

12 mm

4.76 mm

3.97 mm

4.76 mm

\$140

\$129

\$149

Thread Profile	Thread Range	Insert Size	PN	
60° External	0.5 - 1.5 mm	IC 6.35 mm	11ERA60	\$159
60° External	0.5 - 3.0 mm	IC 9.525 mm	16ERAG60	\$159
55° Internal	0.5 - 3.0 mm	IC 9.525 mm	16IRAG55	\$159
60° Internal	0.5 - 3.0 mm	IC 9.525 mm	16IRAG60	\$159
55° External	48 - 16 TPI	IC 6.35 mm	11ERA55	\$159
55° External	48 - 8 TPI	IC 9.525 mm	16ERAG55	\$159

FRLINGEN

Nickel Plated 7 Piece Indexable Lathe Tool Sets



20 mm 26 x 2 & 3 mm

GTN-2, GTN-3

25 mm 32 x 3, 4 & 5 mm GTN-3, GTN-4, GTN-5 H-11-262-T35

H-11-262-T30

\$319

\$489

Nickel Plated CCMT Boring Bar Set

- Set includes boring bars with TiN Micro-Grain Carbide Semi-Finishing CCMT Inserts
- Suited to cast iron, general purpose steel and stainless steel

4 Piece set includes: 8 x 100mm Boring Bar 10 x 125mm Boring Bar 12 x 150mm Boring Bar 16 x 200mm Boring Bar

90° APKT Indexable End Mill Set

- Set includes an APKT tool holder and 20 TiAIN micro-grain carbide inserts
- Suited to semi-finishing of general purpose steel

Shank Dia: 16 mm Length: 85 mm Cutting Dia: 16 mm Inserts Pockets: 2

90° APKT Indexable Nickel Plated Carbide Face Mill Set

PN: H-11-383-T19

- This multi-purpose 90° milling cutter fitted with coated micro-grain APKT inserts allows high depth of cut and feed per tooth.
- Suitable for square shoulder face and side milling of steel, steel alloys, heat resistant steel, stainless steel and as well as cast iron.

Diameter: 50 mm Height: 40 mm Hole diameter: 22 mm Keyway Width: 10.4 mm Set 21 Piece set includes: 1 x 50 mm Milling cutter 20 x TiAIN APKT carbide inserts



\$74:{9

PN: H-11-373-S40

90° APKT Indexable Carbide Face Mills

- · High precision and high stock removal rates.
- · Swiss SFS high strength insert screws.
- High grade alloy steel (HRC45-HRC48).
- Suitable for light to medium square shoulder milling.
- Less than 0.02 mm radial and axial run-out.
- Suits APKT1604 Inserts.



Inserts not

included

90° TCMT Indexable Countersink	1-13mm HSS Stepped Head Drill Set
 Cut 5 times faster than HSS tools Suited to semi-finishing of general purpose steel Includes 2 inserts 	 Stepped head provides stability in thin materials Superior drilling speeds over standard drills
Size: 12 - 32.5 mm Shank: 25 mm Insert: 2 x TCMT16T304	25 piece set includes drill bits from 1 to 13 mm in 0.5 mm increments
Nickel Plated CCMT Boring Bars	\$249 PN: H-512-96-852
Corrosion resistant Nickel Plating	1-13 mm HSS Drill Set
e New	• 135° split point 25 piece set includes drill bits from 1 to 13 mm in 0.5 mm
Shank Size Insert PN 12 x 150 mm CCMT0602** \$12M-SCLCR-06 \$79 16 x 200 mm CCMT09T3** \$16R-SCLCR-09 \$89 20 x 250 mm CCMT09T3** \$20S-SCLCR-09 \$99	increments Material: HSS
• High quality cast iron body	1-13 mm Cobalt/HSS Drill Set • HSS, Cobalt 5% (M35)
Copper plated spindle for spatter protection	135° split point
• Quick-Release spindle	25 piece set includes drill bits from 1 to 13 mm in 0.5 mm increments. Material: HSS, Cobalt 5% (M35)
Jaw Face Miter Capacity PN 105 x 35 mm 85 mm H-40-076-008 \$129	PN: H-512-11-4S1 170 Piece Cobalt/HSS Twist Drill Set
135 x 61.5 mm 120 mm H-40-076-009 \$169	
Drill Press Vises	HSS, Cobalt 5% (M35) 135° split point
Replaceable precision	170 piece set includes ten sets of:
hardened & ground prisma jaws	1.0 to 8.0 mm drill bits in
Rolled trapezoidal	Five sets of 8.5 to 10.0 mm drill bits in
spindle threadHigh quality cast	0.5 mm increments.
iron body	\$479 PN: H-11-275-003
Jaw Face Jaw Opening Weight PN	

100 x 27 mm 75 mm

150 x 34 mm 125 mm

200 x 40 mm 175 mm

3.5 Kg

7.0 Kg

H-41-074-002

H-41-074-004

10.0 Kg H-41-074-005 \$289

\$99

\$169


Eleratio

ER NGEN

Extended T-Handle Tap Wrenches




Adjustable Tap & Reamer Wrenches

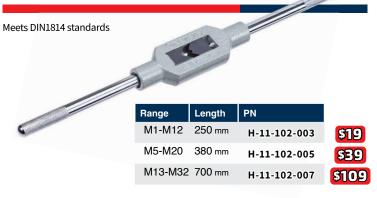



Countersink Set

- · Achieve consistent high quality results and chatterless burr-free operation with the latest unequally spaced geometry
- · CBN ground deep flutes for significantly smoother & sharper cutting edges
- · Suitable for metal, plastics & non-ferrous materials.



Unequally spaced flutes A≠B≠C

6 Piece set includes the following sizes: 6.3, 8.3, 10.4, 12.4, 16.5, 20.5 mm

PN: H-11-040-S01

Master Thread Repair Kits



- · The most reliable and effective tool for thread repair.
- · Quickly and permanently restore stripped, worn or damaged threads to their original size, condition and strength.
- · Increase the strength and durability of threads in soft materials.

1/4" to 1/2" UNC Master **Thread Repair Kit**

Set includes: HSS STI taps & drill bits 1.5D Stainless steel wire inserts in the following sizes: 25 x 1/4"-20 UNC, 25 x 5/16"-18 UNC 25 x 3/8"-16 UNC, 25 x 7/16"-14 UNC 10 x 1/2"-13 UNC



Stainless Steel Threaded 1.5D Inserts

M5 to M12 Master **Thread Repair Kit**

Set includes: HSS STI taps & drill bits 1.5D Stainless steel wire inserts in the following sizes: 25 x M5 x 0.8, 25 x M6 x 1.0 25 x M8 x 1.25, 25 x M10 x 1.5 10 x M12 x 1.75



1/4" to 1/2" UNF Master **Thread Repair Kit**

Set includes: HSS STI taps & drill bits 1.5D Stainless steel wire inserts in the following sizes: 25 x 1/4"-28 UNF, 25 x 5/16"-24 UNF 25 x 3/8"-24 UNF, 25 x 7/16"-20 UNF 10 x 1/2"-20 UNF



Thread Profile	Thread Length	Quantity	PN	
M5 x 0.8	7.5 mm	25	H-11-303-310	\$19
M6 x 1.0	9 mm	25	H-11-303-315	\$19
M8 x 1.25	12 mm	25	H-11-303-320	\$19
M10 x 1.5	15 mm	25	H-11-303-325	\$19
M12 x 1.75	18 mm	10	H-11-303-330	\$19
1/4"-20 UNC	0.375"	25	H-12-303-310	\$19
5/16"-18 UNC	0.46875"	25	H-12-303-315	\$19
3/8"-16 UNC	0.5625"	25	H-12-303-320	\$19
7/16"-14 UNC	0.65625"	25	H-12-303-325	\$29
1/2"-13 UNC	0.75"	10	H-12-303-330	\$19
1/4"-28 UNF	0.375"	25	H-12-303-350	\$19
5/16"-24 UNF	0.46875"	25	H-12-303-355	\$19
3/8"-24 UNF	0.5625"	25	H-12-303-360	\$19
7/16"-20 UNF	0.65625"	25	H-12-303-365	\$29
1/2"-20 UNF	0.75"	10	H-12-303-370	\$19

Precision Angle Lock Milling Machine Vises with Swivel Base

- Thrust ball bearing spindle for higher clamping forces
- Angle-lock designed to prevent jaw lift
- · Vise body made of high grade cast iron
- · Hardened and ground guide surfaces
- · Replaceable hardened and ground clamping jaws
- · Shielded spindle



Jaw Face	Jaw Opening	Weight	PN	
160 x 45 mm	160 mm	39 Kg	H-40-085-006	\$469
200 x 50 mm	235 mm	60 Kg	H-40-085-010	\$899

Precision Angle Lock Milling Machine Vises

- Thrust ball bearing spindle for higher clamping forces
- · Angle-lock designed to prevent jaw lift
- · Vise body made of high grade cast iron
- · Hardened and ground guide surfaces
- · Replaceable hardened and ground clamping jaws
- · Shielded spindle

Jaw Face: 152 x 45 mm Jaw opening: 230 mm

150 mm / 6" Tilting Machine Vise

· This machine vise features great rigidity & clamping force and has engraved quadrants on the tilt and swivel axises.



Jaw Face: 160 x 50 mm Jaw opening: 125 mm Weight: 39 Kg



PN: H-41-089-003

150 mm High Precision Modular Vise

- · High precision accuracy to 0.01 mm
- · Angle-lock designed to prevent jaw lift
- · Made of high grade steel alloy
- · Height matched

Jaw Face: 150 x 50 mm Jaw Opening: 200 mm Overall Length: 420 mm Hardness: HRC 58-62

Weight: 33 Kg

Clamping Kits

· Kits manufactured from high quality quenched and tempered steel with black oxide finish

58 piece Kit includes 24 stud bolts (4 each in length), 75, 100,125,150, 175, 200 mm, 4 extension nuts, 6 stepped finger clamps (3 pairs), 6 T-slot nuts, 6 flange nuts, 3 pairs of stepped blocks



PN: H-40-085-007H

T-Slot	Stud	PN	
12 mm	M10	H-41-061-001	\$169
7/16"	3/8"	H-42-061-001	\$179
14 mm	M12	H-41-061-002	\$189
15.7 mm	M12	H-41-061-002-1	\$189
16 mm	M14	H-41-061-003	\$199
18 mm	M16	H-41-061-004	\$329
20 mm	M18	H-41-061-005	\$579

morrisflex

High quality burrs made in Europe.

1/4" Shank Double-Cut Carbide Burrs

Standard & Non-ferrous 1/4" Shank Carbide Burrs are available in three head diameters.



Stainless Carbide Burrs also available.

Oval Burrs

alline	Size	Length	PN	Price
	1	2"	CBSE1	\$15
	3	2 3/8"	CBSE3	\$00
	5	2 5/8"	CBSE5	\$39

Radiused Tree Burrs

(A)	Size	Length	PN	Price
	1	2"	CBSF1	845
	3	2 1/2"	CBSF3	
T	5	2 3/4"	CBSF5	

Pointed Tree Burrs

6	Size	Length	PN	Price
	1	2"	CBSG1	\$45
	3	2 1/2"	CBSG3	
	5	2 3/4"	CBSG5	<mark>\$39</mark>

Cylinder Burrs

1	Size	Length	PN	Price
	1	2"	CBSA1	SI
	3	2 1/2"	CBSA3	\$66
M	5	2 3/4"	CBSA5	\$39

End Cut Cylinder Burrs

-	Size	Length	PN	Price
NA.	1	2"	CBSB1	SF
	3	2 1/2"	CBSB3	\$ 555
Ĩ	5	2 3/4"	CBSB5	<mark>\$39</mark>

Radiused Cylinder Burrs

(And)	Size	Length	PN	Price
	1	2"	CBSC1	Ş45
	3	2 1/2"	CBSC3	\$00
111	5	2 3/4"	CBSC5	\$39

Ball Burrs

Size	Length	PN	Price
1	2"	CBSD1	345
3	2 1/8"	CBSD3	\$00
5	2 1/4"	CBSD5	\$33

Flame Burrs

65.	Size	Length	PN	Price
	1	2 3/4"	CBSH1	SÆ
	3	2 1/2"	CBSH3	500
Ħ	5	3"	CBSH5	\$39

1/4" Extended Carbide Burrs

6" Extended Size 3 Double-Cut Burrs

			-
	Shape	PN	Price
	Cylinder	CBSA3L6	\$110
and the second s	End Cut Cylinder	CBSB3L6	\$110
	Radiused Cylinder	CBSC3L6	\$1 10
	Ball	CBSD3L6	\$110
Sellin Contraction	Oval	CBSE3L6	\$110
	Radiused Tree	CBSF3L6	\$110
A Constant of the second se	Pointed Tree	CBSG3L6	\$110
	Radiused Cone	CBSL3L6	<u>Ş110</u>


6" Extended Size 3 Non-ferrous Burrs

Shape	PN	Price
Radiused Cylinder	CBSC3L6NF	<mark>\$110</mark>
Ball	CBSD3L6NF	\$110
Oval	CBSE3L6NF	\$110
Radiused Tree	CBSF3L6NF	\$110
Flame	CBSH3L6NF	<u>\$110</u>

Radiused Cone Burrs

1	Size	Length	PN	Price
	1	2"	CBSL1	SA 5
	3	3"	CBSL3	\$00
Y	5	3"	CBSL4	\$33

Cone Burrs



Inverted Cone Burrs

	Size	Length	PN	Price
Ann	1	2"	CBSN1	35
	3	2 1/8"	CBSN3	\$00
	5	2 1/4"	CBSN5	\$33

60° Countersink Burrs

1	Size	Length	PN	Price
	1	2"	CBSJ1	\$45
TT .	3	2 1/4"	CBSJ3	\$00
	5	2 3/8"	CBSJ5	\$33

90° Countersink Burrs

Size	Length	PN	Price
1	2"	CBSK1	815
3	2 1/8"	CBSK3	\$66
5	2 1/8"	CBSK5	\$33

Carbide Burr Sets

PN: CBSET10

PN: CBSET5

1/8" Head **Carbide Burr** 10 Piece Set Shank Dia: 1/8"

1/2" Head

Shank Dia: 1/4'

Carbide Burr

5 Piece Set









3/8" Head **Non-ferrous Burr 3 Piece Set**



1/4" & 3/8" Head Burr 8 Piece Set Shank Dia: 1/4



3/8" Head Stainless Burr **3 Piece Set**












Bolt Removal Kits

The four step extraction kit that enables safe & clean removal of broken studs or screws in confined spaces.



morrisflex



Patent pending geometry and ACCELERATOR Coating has shown up to double the rate of stock removal over conventional burrs.*

Cylinder Burrs					
	Size	Length	PN	Price	
VA	3	2 1/2"	CBSA3NG6C	\$85	
	5	2 3/4"	CBSA5NG6C	\$11	
M					

Radiused Cylinder Burrs



* NG6 Coated Burrs should be operated at a minimum of 25,000 RPM.

1/4" Shank Non-ferrous Carbide Burrs

Cylinder Burrs

-	Size	Length	PN	Price
	1	2"	CBSA1NF	\$07
VA	3	2 1/2"	CBSA3NF	\$33
F	5	2 3/4"	CBSA5NF	\$105

Radiused Cylinder Burrs

a	Size	Length	PN	Price
100	1	2"	CBSC1NF	\$66
	3	2 1/2"	CBSC3NF	
	5	2 3/4"	CBSC5NF	\$105

Ball Burrs

Size	Length	PN	Price
1	2"	CBSD1NF	\$66
3	2 1/8"	CBSD3NF	\$33
5	2 1/4"	CBSD5NF	\$105

Oval Burrs

a	Size	Length	PN	Price
	1	2"	CBSE1NF	\$00
	3	2 3/8"	CBSE3NF	\$33
	5	2 5/8"	CBSE5NF	\$105

Carbide Burr Operating Guide

These are recommended speeds for Standard Length Burrs with no more than a 1/2" overhang from the die-grinder collet. NG6 Coated Burrs should be operated at a minimum of 25K. Extended Burrs are generally subject to much lower maximum safe speeds.

Radiused Cone Burrs

A	Size	Length	PN	Price
	1	2"	CBSL1NF	\$66
	3	3"	CBSL3NF	\$33
	5	3"	CBSL4NF	Ş105

Cone Burrs




Pointed Tree Burrs

6	Size	Length	PN	Price
	1	2"	CBSG1NF	\$66
	3	2 1/2"	CBSG3NF	\$33
M	5	2 3/4"	CBSG5NF	Ş105

Radiused Tree Burrs

	m	Size	Length	PN	Price
		1	2"	CBSF1NF	\$66
		3	2 1/4"	CBSF3NF	\$33
,	M	5	2 3/8"	CBSF5NF	<u>\$105</u>



1/8" Carbide Burrs

1/8" Shank Carbide Burrs are available in the following head diameters:

Radiused Tree Burrs

Length

2 1/2"

2 3/4"

Length

2 1/8"

PN

PN

CBSF3NG6C

CBSF5NG6C

CBSD3NG6C

Price

\$85

Price

S85

S115

Size

3

5

Size


3

Ball Burrs



Shape	Size	PN	Price
Cylinder	0	CBSA43	\$2 9
Cylinder	00	CBSA42	§29
Radiused Cylinder	0	CBSC41	<mark>\$2</mark> 3
Radiused Cylinder	00	CBSC42	<mark>\$2</mark> 3
Ball	0	CBSD42	<mark>\$2</mark> 3
Oval	0	CBSE41	<u>\$2</u> 3
Radiused Tree	0	CBSF42	\$2 3
Pointed Tree	0	CBSG43	\$2 3
Radiused Cone	0	CBSL42	\$2 3
Cone Burr	0	CBSM42	\$2 3



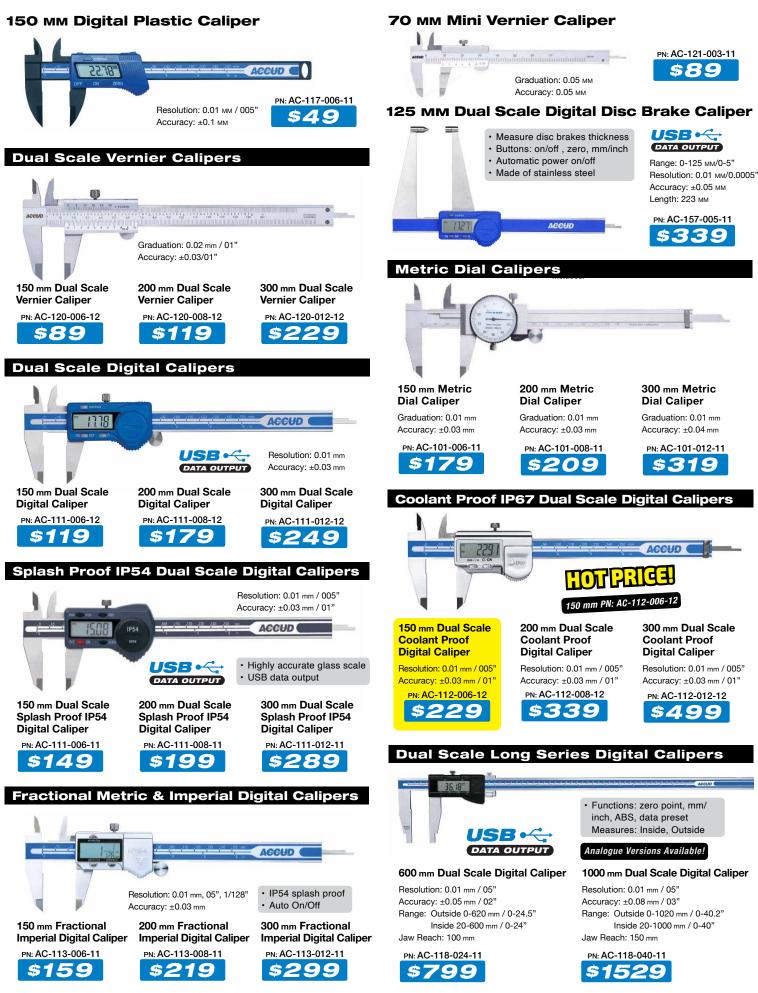



ACCUD



ACCURATE MEASUREMENT || accud.com.au


Page 13

PN: AC-269-060-01

\$49

Contact **Tachometer**

Rotary Range: 0.5-19,999 rpm Linear Range: 0.05-1999.9 m/min Power Supply: 2 x AAA Weight: 106g



PN: AC-CT900 \$139

Digital Sound Level Meter

- · Fast & Slow display functions, Continuous & Min/Max functions
- · Back-lit LCD
- Programmable Exceedence Alarm

Range: 30-130 db Accuracy: 1.5 db Resolution: 0.1 db Weight: 64a



Range: 0.3-30m/s Accuracy: ±5% Resolution: 0.1m/s Weight: 154g

Laser

50 - 500 mm

Weight: 106 g

Sampling Range:

Power Supply: 2 x AAA

Supplied with

45 cm of 3M™

Reflective Tape.

PN: AC-LT900

\$1<u>29</u>

Digital

Back-lit LCD

Anemometer

Tachometer Range: 2.5 - 99,999 RPM



PN: AC-HL350 \$899

Temperature & Wind Speed display

• Unit: m/s, km/h, ft/min, Knots, mph

Real-time/Max/Ave functions

Portable Hardness Tester

Resolution: 1 HLD, 1 HV, 1 HB, 0.1 HRC, 0.1 HRB, 1 HS, 1 MPa

Shore

D2240

· Meets ISO868,

Scale: Shore A

Range: 20-90 HA

Graduation: 1 HA

Accuracy: ±1 HA


Units: HV, HB, HRC, HRB, HS & tensile strength MPa Accuracy: ±8 HLD / 0.8 HRC (HLD=800) Min. sample weight: 5 kg (directly) / 2 kg (supported) / 0.1kg (coupled to plate) Min. sample thickness: 5 mm Min. sample diameter: 22 mm Max. sample roughness: 1.61-Jm(Ra) Power: 3 x AAA battery Dimensions: 121 x 68 x 30 mm






\$99

Refractometers





Engineering Refractometer



- · Records Max. & min.
- temperature & humidity
- Time, Date & Month display

Temperature Range: Indoor: -10 - +50°C Humidity Range: indoor 20% - 99% Power supply: 1.5V (AAA size) x1 Size 96W mm x 105H mm

40 Meter Range

PN: AC-TM40

\$99



100 Meter Range

PN: AC-TM100

\$279

• 12 or 24 hr display modes

Daily alarm function

Alternating display

function

Infrared Thermometers & Imaging

Mutable sample

capture alarm

950° Infrared

Thermometer

Functions: Min/Max. & Average Differential indication,

- High & Low Temp. Alarm & 100 Sample Point Memory Back-light LCD Display Adjustable Emission Compensation
- 1/4"-20 UNC Battery Power Indicator
 - **Tripod Mount**

Full range accud.com.au

- · Laser Sight

1650°C Infrared Thermometer

Range: -50 to 1650 °C Accuracy: 1.5% or 1.5 ° Distance spot ratio: 12:1



ISO7619, ASTM Peak value indicator For material: soft plastic, rubber, leather, etc.

PN: AC-WMM700 PN: AC-HSM1A \$389

FN Coating Thickness Gauge

· Measures thickness of non-magnetic coatings on both magnetic and electrically conductive substraights • V-type probe for cylindrical work pieces

Range: 0 ~ 1500µm Resolution: 0.1µm (0-99.9µm) / 1µm (100-1500µm) Accuracy: 2µm (0-100µm / 3% (100-1500µm) PN: AC-CFN1500B Min. measuring area: 25 × 25 mm Memory: 30 sets \$799













Measures concentration levels of Glycol, Propylene Glycol, Battery fluid, Cleaning liquid & Adblue

Range: 0-10% Graduations: 0.2% Weight: 0.8 Kg



Measures metal working coolant concentration levels

Range: 0-10% Graduations: 0.2% Weight: 0.8 Kg





Laser Distance & Level Meters

()) |

Dual Scale Digital Temperature &

Functions: Distance, Area,

Volume, Indirect distance,

Maximum &

Laser Sight

Accuracy: 1.5 mm Units: Metre/Inch/Foot Light spot: Ø8 mm @ 40 m

Power: 2 x AAA

Weight: 110 g

Memory: 20 data points

Minimum Memory

· Built-in Spirit Level

IP54 Protection Level

 Back-light LCD Display Battery Power Indicator

• 1/4"-20 UNC Tripod Mount

Humidity Monitor

Metric Outside Micrometers



25-50 mm Outside Micrometer

Graduation: 0.01 mm PN: AC-321-002-01 Accuracy: 4 µm \$89 Jaw Reach: 39 mm

75-100 mm Outside Micrometer

Graduation: 0.01 mm PN: AC-321-004-01 Accuracy: 5 µm Jaw Reach: 65 mm

Carbide measuring faces · Setting standard included · Ratchet stop

25 mm Outside Micrometer



50-75 mm Outside Micrometer

Graduation: 0.01 mm PN: AC-321-003-01 Accuracy: 5 µm \$95 Jaw Reach: 53 mm

<u>\$79</u>

PN: AC-324-003-01

\$110

PN: AC-324-005-01

\$149

100-125 mm Outside Micrometer

Graduation: 0.01 mm PN: AC-321-005-01 Accuracy: 6 µm \$129 Jaw Reach: 65 mm

3 Piece Measuring Tool Set

PN: AC-280-000-13

\$299

150 mm Digital Caliper Resolution: 0.01 mm Accuracy: ±0.03 mm

25 mm Outside Micrometer Graduation: 0.01 mm

Accuracy: 4µm **Beveled Square** Size: 100 x 70mm DIN875 grade 0 Squareness: 7µm

Tubular Inside Micrometer Sets



Carbide measuring faces

50-300 mm Metric Tubular Inside Micrometer Set PN: AC-352-012-01 Head Range: 13 mm

\$399

PN: AC-352-024-01

\$499

50-600 mm Metric Tubular Inside

Micrometer Set Head Range: 13 mm Graduation: 0.01 mm

Graduation: 0.01 mm

1/4" Centering Indicator

· For quick and accurate centering in boring and milling set-up Jeweled bearing

· Includes with 7 probes







PN: AC-381-000-00

\$59

Micrometer

Stand

Micrometer

not included

\$89



\$57



Depth Caliper & Micrometers

ACCUD



 USB data output Resolution: 0.01 mm Accuracy: ±0.03 mm

PN: AC-176-001-11 \$159

0-150 mm Micrometer with Captive Anvils

Accuracy: ±3 µm Base size: 101.5 x 17 mm







Depth Caliper PN: AC-171-012-11

\$399

500 mm Digital Depth Caliper



Resolution: 0.01 mm Accuracy: ±0.03 mm

Accuracv: ± 4-6 um

150-300 mm Micrometer 6 Piece Set

Set of 6 Micrometers

Range: 150-300 mm

Graduation: 0.01 mm

Accuracy: ± 4-6 um

Functions: mm/inch, Origin, zero point, ABS, Hold IP65 protection level Carbide measuring faces

· Ratchet stop.



Range: 0-400 mm Graduation: 0.01 mm Accuracy: ± 4-5 µm

Jaw Beach: 53 mm

Graduation: 0.0001"

Accuracy: +0.00025'

Jaw Reach: 65 mm

4-5" Outside Micrometer

150 mm Micrometer 6 Piece Set

Range: 0-150 mm

IMPERIAL SETS

AVAILABLE

Graduation: 0.01 mm Accuracy: ± 4-6 µm Set of 12 Micrometers

PN: AC-321-012-06 Range: 0-300 mm Graduation: 0.01 mm

Coolant Proof Digital Micrometers

25 mm Coolant Proof IP65 **Dual Scale Digital Micrometer**

Graduation: 01 mm PN: AC-313-001-01 Accuracy: 3 µm \$259 Jaw Reach: 25 mm

25-50 mm Coolant Proof IP65 **Dual Scale Digital Micrometer**

Graduation: 01 mm PN: AC-313-002-01 Accuracy: 3 µm Jaw Reach: 32 mm \$279



Set of 6 Micrometers

300 mm Micrometer 12 Piece Set

PN: AC-321-006-06 99

PN: AC-321-012-12

ACCURATE MEASUREMENT || accud.com.au

Page 15





PN: AC-324-004-01

\$99

Imperial Outside Micrometers

1-2" Outside Micrometer

Accuracy: ±0.00015" **\$8**9 Jaw Reach: 39 mm

3-4" Outside Micrometer

Micrometer Sets

Supplied with Calibration certificate

Graduation: 0.0001"

Accuracy: ±0.0002"

Jaw Reach: 53 mm



Dual Scale Stainless Rulers



Straight Edge Rulers



300 mm Straight Edge Ruler

Graduations: 1 mm Beam Width: 40 mm Length: 300 mm

PN: AC-991-012-01 \$149

Graduations: 1 mm PN: AC-991-040-01 Beam Width: 50 mm \$499 Length: 1000 mm

PN: AC-995-009-01

\$19

PN: AC-991-020-01

\$239

500 mm Straight Edge Ruler

1000 mm Straight Edge Ruler

Graduations: 1 mm

Length: 500 mm

Beam Width: 40 mm

Double Ended Scriber

· Nickel plated with Hardened tips · Knurled handle



Radius Gauge Sets



Dividers & Calipers

200 mm Inside Spring Caliper

300 mm Inside Spring Caliper

500 mm Inside Spring Caliper

Length: 200 mm

Length: 300 mm

Length: 500 mm

Range: 18-190 mm PN: AC-982-008-01

Range: 18-290 mm PN: AC-982-012-01

Range: 25-490 mm PN: AC-982-020-01

\$39

\$49

\$79

1-7 mm Radius Gauge Set Range: 1, 1.25, 1.5, 1.75, 2, 2.25, 2.5, 2.75, 3, 3.5, 4, 4.5, 5. 5.5. 6. 6.5. 7 mm

Range: 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 12.5, 13, 13.5. 14. 14.5. 15 mm PN: AC-941-007-34

Gauge Set





Includes concave & convex

gauge for each size



Range: 15.5, 16, 16.5, 17, 17.5, 18, 18.5, 19, 19.5, 20, 21, 22, 23, 24, 25 mm





GO

100 mm Wide Base Machinist Square

Squareness: (α) 28 μm (β): 30 μm Base size: 19H x 12W x 70L mm Blade Thickness: 3 mm



ACCUD

200 mm Wide Base Machinist Square

Squareness: (a) 37 µm (B): 40 µm Base size: 32H x 16W x 130L mm Blade Thickness: 4 mm

PN: AC-845-008-02 \$69

600 mm Wide Base Machinist Square

Squareness: (α) 75 μm (β): 80 μm Base size: 50H x 30W x 350L mm Blade Thickness: 6 mm



Thread Gauge Sets

Metric & Whitworth **Thread Gauge**

Metric 60° Range: 0.25-6.0 mm Whitworth 55° Range: 4-62 TPI



Metric Thread Gauge Metric 60° Range: 0.25 - 6.0 mm PN: AC-922-006-24

\$29

Whitworth Thread Gauge Whitworth 55° Range: 4-42 TPI PN: AC-924-042-30







300 mm Wide Base Machinist Square

Squareness: (a) 47 µm (B): 50 µm Base size: 32H x 19W x 200L mm Blade Thickness: 4 mm



Circumference Tape



60-950 mm Circumference Tape Range: Dia. 20-300 mm / Cir. 60-950 mm Graduation: 0.1 mm



940-2200 mm Circumference Tape

Range: Dia. 300-700 mm / Cir. 940-2200 mm Graduation: 0.1 mm PN: AC-956-028-11



2190-3460 mm Circumference Tape

Range: Dia. 700-1100 mm / Cir. 2190-3460 mm Graduation: 0.1 mm





200 mm Dividing Caliper

Range: 0-190 mm Length: 200 mm



300 mm Dividing Caliper

Range: 0-290 mm PN: AC-986-012-01 Length: 300 mm

\$49 500 mm Dividing Caliper

Range: 0-490 mm PN: AC-986-020-01

\$69

200 mm Spring Divider Range: 0-190 mm PN: AC-985-008-01 Length: 200 mm \$39

300 mm Spring Divider Range: 0-290 mm PN: AC-985-012-01

Length: 300 mm \$49

500 mm Spring Divider



300 mm Outside Spring Caliper Range: 0-290 mm

Length: 300 mm

Length: 200 mm

500 mm Outside Spring Caliper

Range: 0-490 mm Length: 500 mm

200 mm Outside Spring Caliper

Range: 0-190 mm PN: AC-984-008-01



\$39

PN: AC-984-012-01

\$49





Page 16



Deburring Tools

(•geiger,)

PN: GD88030



Workshop Stools & Creepers

Workshop Stool

- 100 мм swivel casters, with 2 lockable
- Centre mounted pull out drawer Metal Frame

(geiger)

Size: 670L x 330D x 380H mm Max. Load: 130 Kg



Workshop Trolleys

Plastic Parts Trolley

- Rounded corners protect walls & furniture
- Soft 4" PVC wheels (2 lockable)
- Deep Pocket shelves
- Handles both ends

Size: 82 x 47 x 105cm Capacity: 130 Kg



Adjustable Hydraulic Stool

• 4" swivel wheels (2 lockable)

Adjustable seat height

Height Range: 450-560 mm Size: 540L x 390W x 560H mm

> STEEL FRAME

• Wide HDPE double

walled seat Bottom Organiser tray

Metal Frame

Max. Load: 150 Kg

Size: 410W x 760D x 885H mm (including handle)



PN: GT3S

Heavy Duty Parts Trolley

PN: GAHS

• 3 Shelves, side container and drawer • 1.6 MM steel uprights.

Mechanics Creeper Size: 1005 x 470 x 135 mm

Wheel Size: 75 x 25 mm

Integrated side trays

STEEL

REINFORCED

CASTER

MOUNTS

Made in Taiwan

Size: 470W x 785D x 825H mm (including handle)



Heavy Duty Parts Trolley

• 3 Shelves, side container and drawer

PN: GCR40

- · Enclosed front & rear for extra rigidity.
- Takes up to 100 kg per shelf, max total weight 200 kg per unit.

Size: 500W x 873D x 880H mm (including handle)



øgeiger.

Wall mountable Pivot Drawers

PN: GT3SP

ADF ROM

IDPE ASTIC

Pivot drawers slot together vertically or horizontally, to be safely mounted to walls or benches. Windowed drawers keep all your spare parts in plain sight with reduced exposure to dust, moisture or other contaminants.

8 Compartment Pivot Drawer Set

Size: 300W x 200H x 67D mm



5 Compartment Pivot Drawer Set Size: 600W x 150H x 123D mm





6 Compartment Pivot Drawer Set

Size: 300W x 250H x 106D mm



4 Compartment Pivot Drawer Set Size: 600W x 200H x 167D mm



5

PN: F0604



Single Sided 46 Bin Pivot Drawer Cart

Includes 2 x FO308, 2 x FO306, 2 x FO605 & 2 x FO604, 46 bins in all



Double Sided 92 Bin **Pivot Drawer Cart**


Includes 4 x FO308, 4 x FO306, 4 x FO605 & 4 x FO604, 92 bins in all

\$1399 **PN: MSF04568X2** Cart Size: 690W x 560D x 1460H mm



Additional freight charges may apply.



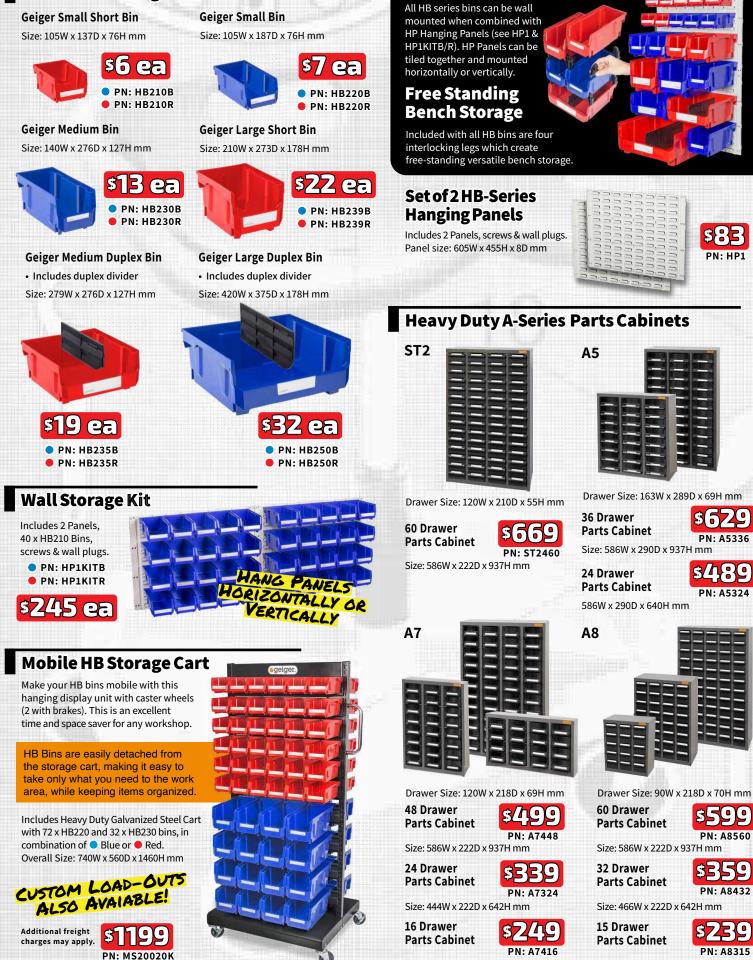

Size: 586W x 222D x 350H mm

Size: 355W x 222D x 415H mm Page 20



Heavy Duty Lockable A7 Parts Cabinets

Each drawer comes with 2 movable dividers. The front face of each drawer features a window.

Lockable 48 Drawer Parts Cabinet

Size: 586W x 270D x 970H mm



PN: A7448D

PN: A7324D

នាត

Lockable 24 Drawer Parts Cabinet

Size: 444W x 270D x 677H mm



HD-Series Storage Bins

The 60 drawer NHD560 takes up to 600 kg total weight and up to 100 kg per shelf. Each drawer comes with 2 movable dividers and is acid and oil resistant. The window front makes it easy to identify the contents. Size: 880W x 400D x 1725H mm





The HD drawers are designed to be fully opened and not fall out, even at the 10 kg maximum weight limit and feature transparent windows for easy parts identification.

HD Drawer

External Size: 160W x 410D x 110H мм Internal size: 140W x 370D x 100H MM



HD Drawer Dividers



30 Drawer Parts Cabinet

980W x 400D x 1010Н мм (inc handle and caster wheels)



Each drawer comes with 2 movable dividers and Can take up to 7 Dividers. All is acid and oil resistant.

60 Drawer HD Series Steel Parts Cabinet

The 60 drawer NHD560 takes up to 600 κg total weight and up to 100 Kg per shelf. Each drawer comes with 2 movable dividers and is acid and oil resistant. The window front makes it easy to identify the contents. 880W x 400D x 1725H mm



Steel HD Series Parts Cabinets

HD cabinets take up to 100 Kg per shelf. Each drawer comes with 2 movable dividers and is acid and oil resistant. The front face of each drawer features a window which makes it easy to identify the contents.

Drawer size: 160W x 110H x 410D мм

15 Drawer Steel Parts Cabinet

Size: 880W x 400D x 440H мм

18 Drawer Steel Parts Cabinet

Size: 550W x 400D x 880H mm External Size: 160W x 110H x 410D MM **30 Drawer Steel Parts Cabinet**

880W x 400D мм x 880H мм External size: 160W x 110H x 410D MM

\$699 PN: HD318	Additional freight charges may apply. PN: H

Multi Function Storage Bin

Includes bin and lid. Made from high impact polypropylene. Size: 450W x 360D x 250H MM



\$349

The NHA3645 bins can be stacked without a lid or nested together when not being used.



Multi-Function Bins & Crates

Jumbo Storage Bin

Includes removable two stage folding lid. Made from impact resistant polypropylene. Size: 395W x 635D x 335H mm

Foldable Crates

Stackable in both collapsed and extended configuration

Size: 535W x 360D x 280H mm Collapsed Height: 50 mm



50 LITRE CAPACITY!

PN. HB4068B

SPACE SAVING COLLAPSIBLE DESIGN

KES UP TO SOKO!



Pick & Pry Tools and Screwdrivers

Precision Two-Way Ratcheting Screwdriver Set

Set Includes 30-Tooth Full Aluminium Ratcheting Screwdriver, H4 mm x 50 mm L Bits in Phillips: #000 / #00 / #0 / #1 / #2 / #3 Torx: T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 Slotted: 1.0 / 1.5 / 2.0 / 2.5 / 3.0 / 4.0 / 6mm Hex: H1.5 / H2.0 / H2.5 Square: S1/S2



Slotted & Phillips Screwdriver Set

- Made from industrial grade Chrome Vanadium Steel Alloy (Cr-V) for superior durability and rust resistance.
- PP+TPV Rubber Soft Grip Handle provides users with greater comfort and torque application.
- Permanent magnetic tips enable placement of fasteners in confined areas.

8-Piece Set Includes: 6.5 mm slot / 38 mm shank 5 mm slot / 75 mm shank 6 mm slot / 100 mm shank 8 mm slot / 150 mm shank

#2 Philips / 38 mm shank #1 Philips / 75 mm shank #2 Philips / 100 mm shank #3 Philips / 150 mm shank



Precision Screwdriver Set

- Made from industrial grade Chrome Vanadium Steel Alloy (Cr-V) for superior durability and rust resistance.
- Permanent magnetic tips enable placement of fasteners in confined areas.
- Soft PP+TPV Rubber Grip provides users with greater comfort and torque application.



7-Piece Set

\$5(2)

PN: MP002007

Phillips Sizes: 00, 0 & 1 Slotted Sizes: 1.6. 2. 2.4 & 3.15 mm Shank: 60 mm

Torx Screwdriver Set

- Permanent and strong magnetic
- tips to firmly hold screws.
- PP+TPV Rubber Soft Grip Handle provides users with greater comfort and torque application.
- Patented SVCM Satin Chrome Plated Steel. Meets and even exceeds ANSI standards
- for performance and quality.



Set Includes: T10, T15, T20, T25, T27, T30, T40 Shank: 100 mm

7-Piece Set \$(55 PN: MP002010

Precision **Hook & Pick Set**

Includes full hook, right angled hook, angled hook and straight pick.

4-Piece Set

\$7L PN: MP002006

19-in-1 Multi Bit Ratchet Screwdriver

Includes an assortment of 16 tips: 1/4" Hex x 75 mm double end bits: 3 mm Slotted & Phillips #0 5 mm Slotted & Phillips #1 6.5 mm Slotted & Phillips #2 1/8" Hex & Hex 3/16" T15 Torx & T20 Torx Pozi #1 & Pozi #2 Square #1 & Square #2 5/16" Hex x 75 mm double end bits: Phillips #3 & Slotted Nutdrivers: 2 x Nutdrivers on tube 1/4" x 5/16"

1 x Nutdriver on ratchet 7/16"



PN: MP002001

7-in-1 Ratcheting Nut & Screwdriver Driver

Includes 25-Tooth Ratchet Screwdriver with storage for two double ended bits: Philips #1 / 5 mm slot & Philips #2 / 6mm slot. It also features a Stainless Steel Collar with 1/4 & 5/16 Hex tips with magnetised bit tips to hold screws.



- Supplied in foam tray
- Black oxide finish

4-Piece pry bar set includes 150, 300, 405 & 510 mm sizes





Page 23



Hex Key Wrench Sets



Wrenches

Combination Wrenches

- Combination Wrenches with patented
- super comfortable spiral grip design • The 12-Point closed end doubles the
- access angle compared to 6-point
- 0 & 15 degree taper at the open end allows better accessibility

Super Comfortable Wide Body Grip



Closed End





Metric Combination Wrenches

8 piece set includes 8, 10, 11, 12, 13, 14, 17 & 19 mm

\$119 PN: MP001015


\$119

PN: MP001014

Tapered

Open End

Imperial Combination Wrenches



11-in-1 Ratchet Wrench with Interchangeable Gear Rings

• Our gear ring spanner replaces the need to carry a full range of wrenches. Simply insert the desired gear ring and start using it!

Includes 90 Tooth Double End Ratchet Wrench, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17 & 19 mm gear rings and a durable storage case.



\$1/40

PN: MP009015

Auto Adjusting Crowsfoot Wrenches & Adapters

This spring-loaded, self adjusting design tightens it's grip as force is aplied, making it ideal for damaged extraction bolts and pipe work.



- Multiple square drive attachment point make ideal for confined spaces.
- Range: 5-32 mm







Page 24

Ratchet Wrenches and Adapters



Extension Breaker Bars

These time and space saving breaker bars featuring a square drive socket in the handle and a centre detented in knuckle. Enabling it to both function as a breaker bar and extension bar.



Centre Detent

Manufactured from extremely durable and corrosion-resistant mirrored chrome vanadium steel. Square Drive

Socket End

3/8" Drive x 300 mm **Extension Breaker Bar**

1/2" Drive x 450 mm **Extension Breaker Bar**

Set of 3 Extension **Breaker Bars**

Set includes: 1/4"drive 150 mm long breaker bar 3/8"drive 300 mm long breaker bar 1/2" drive 450 mm long breaker bar



\$3{)

PN: MP007003

PN: MP007004





0000000000

100

mannin

PIECF

IECE

Socket Sets 1/4" Socket Set

Chrome Vanadium Steel

Set includes Ratchet Wrench, Driver Handle, 50 mm Extension, Tee Bar & Universal Joint. Standard Socket sizes: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, & 14 mm Hex Bits: 3, 4, 5 & 6 mm Philips Bits: #1, #2, & #3 Pozidriv Bits: #1, #2 & #3 Slotted Bits: 3, 4 & 6 mm Torx[®] Bits: T8, T9, T10 T15, T20, T25, T27, T30, & T40

\$89 PN: GXSS1440

3/8" Socket Set

 Chrome Vanadium Steel Set includes Ratchet Wrench, 75 & 150 mm Extension Bars and Universal Joint. Standard Socket sizes: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 & 22 mm Deep Socket sizes:

10, 11, 12, 13, 14, 15, 17 & 19 mm Spark Plug Socket: 16 & 21 mm



Gear & Bearing Splitting Combination Set

Small Bearing Separator

Jaw Range: 30-50 мм Working Range: 0-135 мм

Large Bearing Separator

Jaw Range: 50-75 мм Working Range: 0-180 мм

Includes Centre Adapter.

S45C Drop Forged hardened Main Beam and **Bearing Separators.**



Helping Hand Magnifier Features a

iron base, two articulated alligator clamps and magnifying glass.

Main Beam: 115 mm Arm Reach: 75 mm Lens Dia.: 60 mm

PN: GHHM

\$={!)

PN: GXBS1465

Precision Screwdriver Set

65 piece set includes: 4 mm & 1/4" Driver Handles & **Extension Bars** Hex: 0.9, 1.3, 1.5, 2.0, 3, 4, 5 & 6 mm Slotted: 1.0 & 1.5, 2.0, 2.5, 3, 4, 5, 6 & 7 mm Pozidriv: #0 to #3 Phillips: 000 to 3 Square: 0 to 3 mm Sockets: 5 to 13 mm Torx®: T5, T6, T7, T8, T9, T10,

T15, T20, T25, T30 & T40

Magnetic Clean-Up Tools

Magnetic Clean-Up Wand Capacity: 6.30 Kg Length 400 mm Weight 0.470 Kg

\$P: C PN: MW001

Magnetic **Reach Extender** Head size: 96 мм Length: 960 мм Capacity: 4.5 Kg

\$115 PN: MRE001

magnetic pickup Handle Length: 720-1035 mm Head width: 377mm

65

PIECE

SE7

\$155 PN: MB001

Magnetic Broom

on main shaft

Wide section

Side mounted wheels for

easy use over wide areas

• Telescopic main shaft Easy release trigger

Multi-Hydraulic Gear Puller Kit

Bearing Separator

S45C Drop Forged hardened Bearing Separator.

Working Range: 0-370 мм Jaw Range: 75-105 мм


Gear Puller

Working Range: 25-185 мм

Set includes: Twin & **Triple Leg Heads** Hydraulic Ram (12 Ton capacity) **Carbon Steel Beam** 200 мм, 150 мм, & 100 мм arms 85 мм, 35 мм, Spacers, 25 мм Centre Adapter








A 2-in-1 fastening tool that sets nutserts as well as blind rivets.



- Sets steel & aluminium rivets up to 4.8 MM & Nutserts up to M6 Sets stainless rivets up to 4.0 MM & Nutserts up to M5
- M3 to M6 nutserts







Sets 2.4, 3.2, 4.0 & 4.8 mm Rivets AND M3, M4, M5 & M6 Nutserts

Heavy Duty Rivet & Nutsert Tool

- Sets steel & aluminium rivets up to 6.4 мм (1/4") AND nutserts up to M10
- · Sets stainless steel rivets up to 4.8 мм (3/16") AND nutserts up to M8
- Space-Saving Foldable Handles
- Forged Main Arms



PN: GHTH3

Sets 3.2 (1/8"), 4.0 (5/32"), 4.8 (3/16") & 6.4 mm (1/4") Rivets and M4, M5, M6, M8 & M10 Nutserts



Medium Duty Riveting Tool

 Sets steel & aluminium rivets up to 4.8 мм (3/16") • Sets Stainless Steel Rivets up to 4.0 мм (5/32")

Sets 2.4 (3/32"), 3.2 (1/8"), 4.0 (5/32") & 4.8 mm (3/16") rivets

Heavy Duty Riveting Tool · Sets steel, aluminium & stainless

rivets up to 4.8 MM (3/16")

Sets 2.4 (3/32"), 3.2 (1/8"),

4.8 mm (3/16") rivets

4.0 (5/32") &



Hex Key Sets

Metric 9 Piece Ball End Hex Key Set 🔵

Sizes: 1.5, 2, 2.5, 3, 4, 5, 6,8 & 10 mm

Imperial (SAE) 13 Piece Ball End Hex Key Set

Sizes: 0.05",1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" & 3/8"

13 Piece Torx® Wrench Set O

Sizes: T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40, T45 & T50

13 Piece Tamperproof Torx[®] Wrench Set

Sizes: T6H, T7H, T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H & T50H



Pistol Grip Nutsert Tools FORWARD + REVERSE

- Average cycle time of 3 seconds
- Quick & simple to operate
- Fwd. / Rev. Toggle Switch
- Not suitable for mass production

M6 Nutsert Tool

M3, M4, M5, M8 & M10 mandrels M10 & M12 mandrels available (sold separately) Weight: 1.3 Kg

available (sold separately) Weight: 1.3 Kg

M8 Nutsert Tool

\$7/9)9 **PN: GP200B**

Steel & Aluminium Nutserts

4 мм Мах. sheet thickness

\$789

PN: GP400B

M4 Aluminium PN: NM4RNA M5 Aluminium PN: NM5RNA M6 Aluminium PN: NM6RNA M8 Aluminium PN: NM8RNA M10 Aluminium 23 PN: NM10RNA

1.13	•	
B	M4 Steel PN: NM4PNS	SIC
Ø	M5 Steel PN: NM5PNS	\$25
6	M6 Steel PN: NM6PNS	\$22
Q	M8 Steel PN: NM8PNS	\$3 2
Ø	M10 Steel PN: NM10PNS	SE
	M12 Steel PN: NM12PNS	\$65

Automotive **Nutsert Gun**

PACKS

OF 50


- Sets M4, M5, M6, M8, M10 nutserts in steel & aluminium Sets Stainless Steel nutserts up to M8
- Not suitable mass

production applications

Traction Power: 3,640 Ft/lbs Stroke: 6 mm Weight: 1.55 Kg









PN: KP4258

LED TORCHES & HEADLAMPS



🗟 nicronlight.com.au







A dedicated built-in LED battery indicator. Applicable to PN: B400 & WL83



Illuminated muli-function switch with Battery State Indicator. Displays battery state with back-lit multi-colour LED button. Applicable to PN: B200, B73R, B71pro,

B75 & B70PLUS & WL81

Dual Fuel Capability 10840 Li-ion

Able to accept high capacity rechargeable and standard A series batteries.

Applicable to PN: B73R, B74BLUE, B74RED & F51



Ingress Rating

2 x AAA

Integrated Charging Port

Recharge without the need to remove the battery with an integrated change port.

Applicable to PN: B10, B200, B400, B71PR0, B75, B70PLUS, F81, H11, H17, H35, WL15, WL81-83-85



1m

Extreme Tactical Flashlight

Ingress

Rating

IPX8

2m

Charge

Port

USE



- · Flood & Spot functions
- Fast Charging Li-ion
- · Beam proximity sensor
- USB-A power bank functionality

Brightness: 16,000 Lm Intensity: 19,3600 Cd

Primary Beam: LOW (7Lm) MED (170Lm) HIGH (3,450Lm) MAX (12,300Lm) **EXTREME** (16,000Lm) STROBE: (6,000Lm) Size: 175 x 82 mm Weight: 880g

Battery Tripod Indicator Mount

53 PN: WL83

- · Top mounted hanger
- Top mounted spot light
- · Front mounted flood light Handle incorporates
- foldout stand

Brightness: 500 / 200 Lm Intensity: 225 Cd

Primary Beam: LOW (200Lm) HIGH (500Lm) Spot Light: LOW (200Lm)

Size: 200 x 60 x 30 mm Weight: 285g

Base

Battery Charge Magnetic Port Indicator




2 in 1 Utility Work Lamp

Ingress Rating

 Foldout stand with integrated hook Primary Beam: LOW (12 Lm) MED (160 Lm) HIGH (450 Lm)







Mini Flashlight





PN: B10

Primary Beam: LOW (30Lm) MED (100Lm) HIGH (200Lm) STROBE: (200Lm) Size: 65x 20mm Weight: 45g

• High Capacity Li-ion Rechargeable

Mini Key Chain Flashlight



Mini Focusable Flashlight



Focusable Flashlight

1 x AA





- · 24 hour battery life Two-Way Pen Clip
- Magnetic Base

Brightness: 1000 Lm Intensity: 1440 Cd

Primary Beam: LOW (120Lm) MED (400Lm) HIGH (1000Lm) STROBE: (1000Lm) Size: 85 x 16 mm Weight: 34 G

PN: F51

• Focusable Beam

- Includes USB rechargeable battery
- · AA batteries NOT included
- Pen Clip

Brightness: 600 Lm Intensity: 3800 Cd

Primary Beam: LOW (100 Lm) MED (250 Lm) HIGH (600 Lm) Size: 103 x 26 mm Weight: 80g



Brightness: 1000 Lm Intensity: 6500 Cd



Rating

Charge Port USE











KUANI PNEUMATIC TOOLS

Compact Needle Scaler

Gear up your world



Impact Rate: 3,700 BPM

Overall Length: 350 мм 19 Needles Ø3 x 180 мм

្ត្រាក្រុ PN: KP4722P

Pittsburgh Air Hammer



3" Orbital Pistol **Grip Sander**

• Side mounted speed regulator Free Speed: 15,000 RPM Weight: 0.58 Kg





1" Super Duty Impact Wrench

Free Speed: 5,000 RPM

PN: KP1838A-P

Great for Truck Shops1









• Included socket sizes: 8, 10, 12, 13, & 14 мм 5/16, 3/8, 7/16, 1/2 and 9/16" 1/4" & 3/8" anvils





Free Speed: 450 RPM Max. Torque: 30 Ft/lbs Weight: 0.60 Kg

PN: KP2219

Heavy Duty Air Caulking Gun

(ha Takes 50 мм diameter sausages 400. 500 & 600 ml sizes. Air pressure: 45-90 PSI Length: 550 мм PN• KP4613 Weight: 0.9 Kg **Dual Chuck Tyre Inflator** Units: PSI, kg/cm2, KPA & Bar Air Flow: 1.28 CFM @ 100 PSI Tana S Range: 0-220 PSI Hose Length: 750 MM Weight: 1.2 Kg PN: KP79G07

1" Super Duty Impact Wrenches

Free Speed: 5,500 RPM Max. Torque: 1,600 Ft/lbs Air Inlet: 1/2"

Length: 325 мм Weight: 5.8 Kg



1" HD Impact Wrench

- · Rubber body protection
- 4 power settings with forward &
- reverse selector Side handle

Free Speed: 3,500 RPM Max. Torque: 2,500 Ft/lbs Lenath: 436 мм Air Inlet: 1/2" Weight: 15.55 Kg



PN: KP1050 \$2999

6" Extension Free Speed: 5,500 RPM Max Torque: 1,050 Ft/lbs Weight: 6.85 Kg

3/4" Impact Wrench with

PN: KP1030

PN: KP1030-6

Weight: 6.1 Kg





Page 36



Page 37



PN: THBF804

PNEUMATIC CONTROL UNITS



\$79 ea

\$269 ea Replacement dryer desiccant pack of 2 PN: THBDES \$20

PN: THBFR-FLM864

Ezi-Shear Professional sheet metal cutting attachments

The Ezishear range delivers outstanding service life and economical operation through the utilization of replaceable blades and standard bolts and bearings.

Max. Speed: 2400 RPM Cutting Capacity: Stainless Steel: 1.2 mm Mild Steel: 1.6 mm Aluminium: 2.2 mm

Shaft-Drive Ezi-Shear

Shaft-Drive Ezi-Shear Drill Head: Fits drills with Metal gearbox with a 43 mm diameter (European standard) neck and at least 15 mm shank

QF

3/8" Drive PN: EZIS038

1/2" Drive PN: EZIS012



'Cam-Drive Ezi-Shear

Cam-Drive Ezi-Shear to suit **Dewalt™**

Metal Shears (DCS491N)

Dewalt XR™

PN: EZISDEW

Cam-Drive Ezi-Shear

Cam-Drive Ezi-Shear to suit **Milwaukee™**

Milwaukee M18™ 14 Gauge Double Cut Shears (2636-20) Milwaukee M18™ 18 Gauge Single Cut Shears (2637-20) Milwaukee M18™ Double Cut Shears (2635-20)



Hex-Drive Ezi-Shear

Hex-Drive Ezi-Shear to suit **FESTOOL™**

 FESTOOL DR 18™ QuaDrill Electric

 Drill 705W (768936)

 FESTOOL DRC 18™ Drill (500782)

 FESTOOL DRC 18™ Drill 18V (500752)

 FESTOOL PDC 18™ Hammer Drill (500781)

 FESTOOL DRC 18™ Drill 5.2Ah (201557)

 Metabo Hammer Drill (SB18LTX BL)



ST SHERE

Cam-Drive Ezi-Shear

Cam-Drive Ezi-Shear to suit **Makita™**

Makita™ 18V Offset

Makita™ 18V D-Handle

Offset Shear (DJS132Z)

Shear (DJS131Z)

PN: FZISMAK



3/16" Medium Duty Riveter

 Suitable for Aluminium & Mild Steel rivets

Capacity: 2.4 mm(3/32") to 4.8 mm(3/16") Traction power: 1045 κg Stroke: 16 mm Weight: 1.56 κg





3/16" Compact Riveter with Vacuum Extraction

- Suitable for Aluminium &
- Mild Steel rivets

 Vacuum Mandrel collection
- Low Recoil Technology

Capacity: 2.4 mm (3/32") to 4.8 mm (3/16") Traction power: 908 Kg Stroke: 15 mm Weight: 1.39 Kg



PN: FP4032CVK

vith | 3/16" Heavy Duty Composite Riveter

Suitable rivets of all materials

Low Recoil Technology

Capacity: 2.4 mm (3/32") to 4.8 mm (3/16") Traction power: 908 κg Stroke: 23.5 mm Weight: 1.55 κg



1/4" Riveter with Vacuum Extraction

- Automatic mandrel collection
- Sets steel and stainless ONLY
- Swivel air inlet

Capacity: 4.8mm (3/16"), 5.6mm (7/32") & 6.4mm (1/4") Traction power: 1645 κg Stroke: 15 mm Weight: 1.8 κg



5/16" Heavy Duty Composite Riveter

- Vacuum mandrel collection
- Suitable rivets of all materials
- Swivel air inlet

Capacity: 3/16", 7/32", 1/4" & 5/16" Traction power: 1723 кg Stroke: 22.5 mm Weight: 1.8 кg








Page 40



Page 41



Geiger AIR TOOL ACCESSORIES

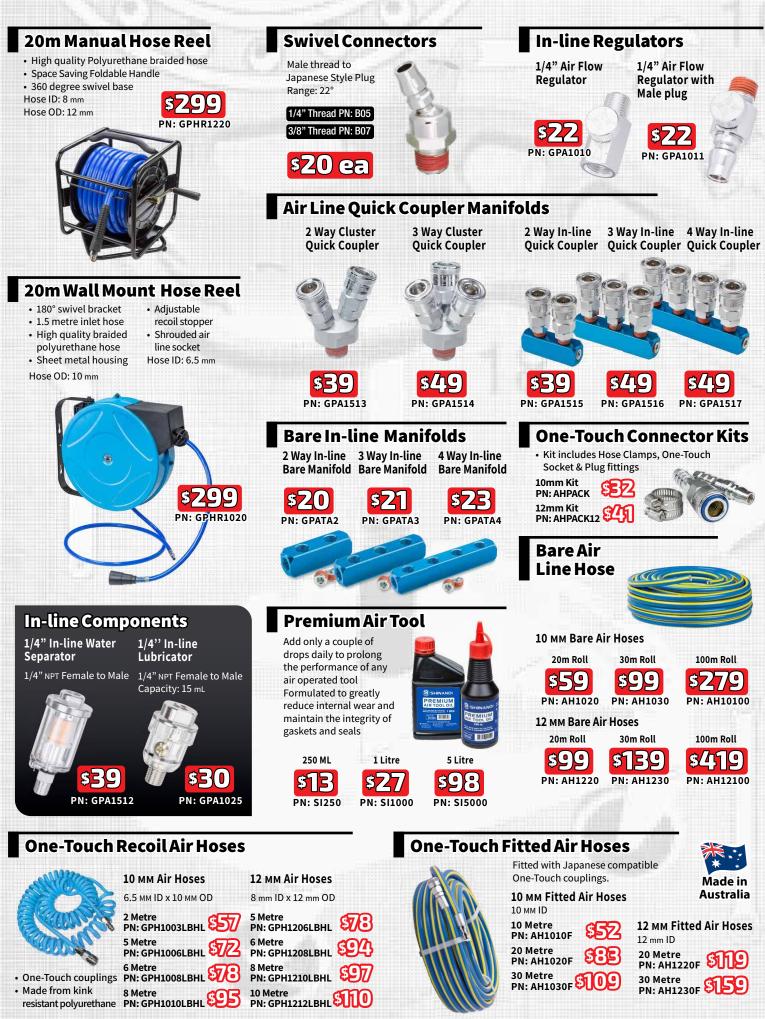

HOT PRICES! Made from Chrome Molybdenum Steel CR-MO. Impact Socket Sets Meet or exceed DIN & ANSI standards. 3/4" Drive Impact Socket Sets

3/8" Drive Impact Socket Sets

8 Piece Metric PN: GX838SSM

Sizes: 8, 10, 11, 12, 13, 15, 17 & 19 mm

8 Piece Imperial PN: GX838SSI Sizes: 5/16", 3/8",

7/16", 1/2", 9/16", 5/8", 11/16" & 3/4"

1/2" Drive Impact Socket Sets

13 Piece Metric PN: GX1312SSM Sizes: 10, 12, 13, 14, 15,

17, 18, 19, 21, 22, 24,

27 & 30 mm

13 Piece Imperial PN: GX1312SSI

Sizes 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8 & 1-1/4"

Sizes: 26, 27, 29, 30, 32, 35, 36 & 38 mm

8 Piece Metric

PN: GX834SSM

8 Piece Imperial PN: GX834SSI

Sizes 1, 1-1/16, 1-1/8, 1-1/4, 1-5/16, 1-3/8, 1-7/16 & 1-1/2"



Wobble Impacting Impact **5 Piece Square** Universal **Drive Adapter Bar Sets** Joints Sets Molybdenum geiger. Steel CR-MO. 3/8" Drive \$74:} \$749 **Universal Joint** PN: GXBBU Chrome Molybdenum Steel CR-MO. PN: GX5AS 1/2" Drive **Chrome Vanadium** <u>(2</u>2) **Universal Joint** 1/4" Set of 4 Wobble 1/2" Set of 4 Wobble 1/4" Female to 3/8" Male PNs GX120 **Extension Bars** \$59 **Extension Bars** 1/2" Female to 3/8" Male 3/4" Drive 3/8" Female to 1/4" Male \$57 Kit includes: Kit includes: PN: GXWEBS14 PN: GXWEBS12 **Universal Joint** 1/2" Female to 3/4" Male 3", 6", 10" & 12" bars 3", 5", 10" & 18" bars PNs GX34U 3/8" Female to 1/2" Male

Twin LED Rechargeable **Inspection Lamp**

Ideal for automotive panel & paint inspection or any confined automotive or industrial work environments.

SUPER

BRIGHT

TUMENS!

- Precision adjustable dimmer switch
- Multistage battery indicator light
- Magnetic ball jointed adjustable base
- Dual retractable lamp hangers
- USB rechargeable Li-ion battery
- Magnetic retrieval wand at tip
- IP54 dust & water resistant

\$159) PN: GLED2CIL

Desktop Magnification Lamp

LED LAMP

- Adjustable height & angle Bright 560 Lumen LED • Interchangeable 100 мм lamp with lens cover
- lens (sold separately) 560 LUMEN Lens dia.: 100 mm

Magnification: 3 Diopter Max lens height: 300 mm Brightness: 560 Lumen Power supply: 240V Cord length: 1.3m

<u>sc)</u>

PN: ML30

Workbench **Magnification Lamp**

- Mountable to most workbenches up to 60 мм thick
- 900 мм Two piece articulated arm • 60 LED lamp with
- high & low modes
- High quality metal frame construction.



260

LUMEN

Magnification: 3 Dioptre Lens dia.: 120 mm Lamp: 60 x LED Power: 240 V



Distributed by:

Gamer

Not all products in this brochure are available from all outlets. Prices may vary in some country areas due to freight costs. All products in this brochure were available at time of printing. M. Gamer Pty. Ltd. will do everything possible within reason to maintain stocks of products. M. Gamer Pty Ltd reserves the right to change prices without notice. All prices quoted include GST.